MOCEKO OXYPELL

Top-fed model

MOCEKO OXYPELL	Unit	8 kW	12 kW	16 kW	20 kW	25 kW
A	mm	980	980	980	980	980
B	mm	370	450	510	570	650
B1	mm	480	560	620	680	760
C	mm	730	730	730	730	730
E	mm	1040	1040	1040	1040	1040
H	mm	1460	1460	1460	1460	1460
Hopper capacity	dm3	50	60	65	75	85
Flue outlet diameter ø	mm	160	160	160	160	160
Flow connection ”a”	inch	2x1”GW	2x1”GW	2x1”GW	2x1”GW	2x1”GW
Return connection ”b”	inch	2x1”GW	2x1”GW	2x1”GW	2x1”GW	2x1”GW

The boiler is on the ZUM list (List of Green Devices and Materials) 8kW/KB-103580, 12kW/KB-903581, 16kW/KB-703582, 20kW/KB-503583, 25kW/KB-303584

MOCEKO OXYPELL

Side hopper model

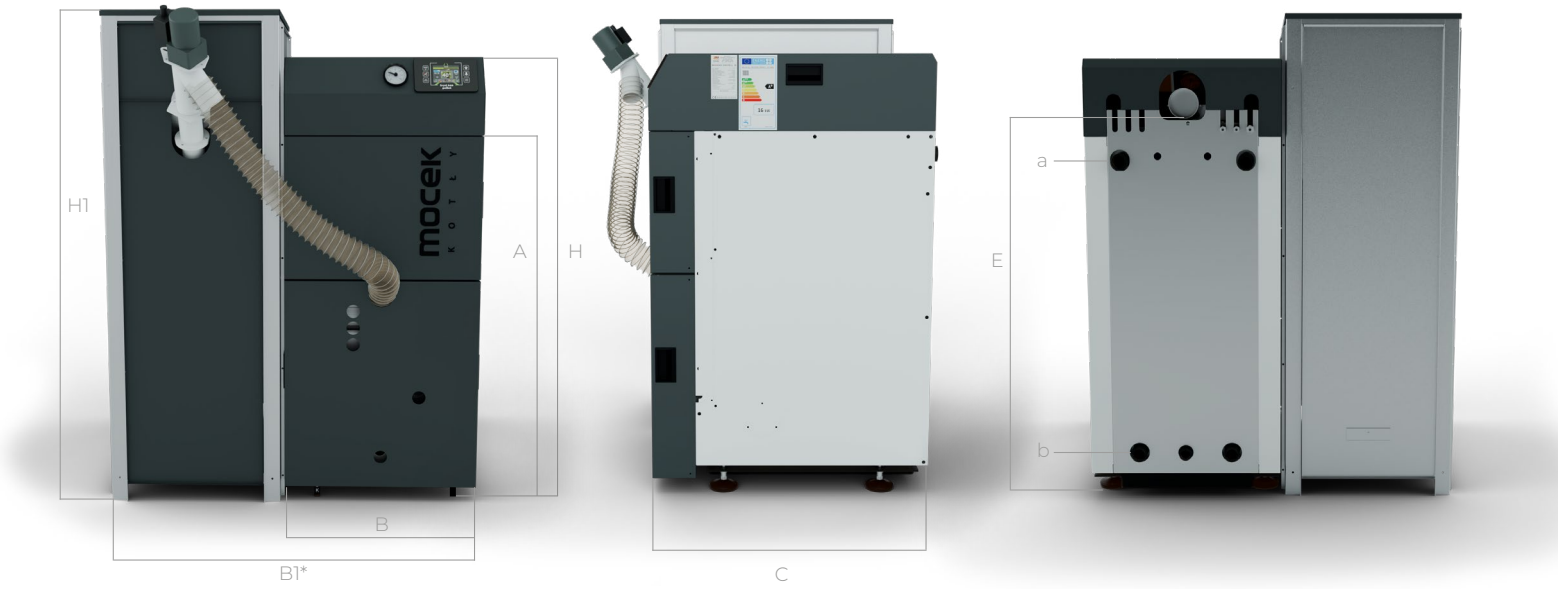

MOCEKO OXYPELL	Unit	8 kW	12 kW	16 kW	20 kW	25 kW
A	mm	980	980	980	980	980
B	mm	370	450	510	570	650
B1*	mm	520	760	970	1030	1250
C	mm	730	730	730	730	730
E	mm	1040	1040	1040	1040	1040
H	mm	1180	1180	1180	1180	1180
Hopper capacity	dm3	100	125	180	180	230
Flue outlet diameter ø	mm	160	160	160	160	160
Flow connection ”a”	inch	2x1”GW	2x1”GW	2x1”GW	2x1”GW	2x1”GW
Return connection ”b”	inch	2x1”GW	2x1”GW	2x1”GW	2x1”GW	2x1”GW

* Side hopper width depending on available space and customer preference Dimension B + 20/34/45/60 cm

The boiler is on the ZUM list (List of Green Devices and Materials) 8kW/KB-103580, 12kW/KB-903581, 16kW/KB-703582, 20kW/KB-503583, 25kW/KB-303584